

**ORGANISATION EUROPEENNE POUR LA RECHERCHE NUCLEAIRE  
EUROPEAN ORGANIZATION FOR NUCLEAR RESEARCH**

Laboratoire Européen pour la Physique des Particules  
European Laboratory for Particle Physics

## **CMS Tracker Optical Readout Link Specification**

### **Part 3: Terminated Fibre Ribbon Cable**

*Preliminary* Version 3.3, 27 April, 2001

**CERN EP/CME**

<b>1. INTRODUCTION</b> .....	<b>2</b>
1.1. GENERAL SYSTEM DESCRIPTION .....	2
1.2. DOCUMENT STRUCTURE AND CONVENTION .....	3
1.3. RELATED WWW SITES .....	4
1.4. CONTACT.....	4
1.5. DOCUMENT HISTORY.....	4
<b>2. TECHNICAL REQUIREMENT, PART 3: TERMINATED FIBRE RIBBON CABLE</b> .....	<b>5</b>
2.1. DESCRIPTION .....	5
2.2. BLOCK DIAGRAM .....	5
2.3. TARGET SPECIFICATIONS (@25°C UNLESS OTHERWISE NOTED) .....	6
2.4. OPERATING ENVIRONMENT .....	7
2.5. OPEN CHARACTERISTICS .....	7
2.6. TESTING .....	8
2.7. OPTIONS .....	8
<b>3. GLOSSARY</b> .....	<b>9</b>
3.1. SIGNAL TO NOISE RATIO.....	9
3.2. INTEGRAL NON-LINEARITY .....	9
3.3. SETTling TIME.....	10
3.4. SKEW .....	10
3.5. JITTER.....	10
3.6. CROSSTALK.....	10
3.7. INSERTION LOSS.....	11
3.8. POWER SUPPLY REJECTION RATIO.....	11
<b>4. REFERENCES</b> .....	<b>12</b>

# 1. Introduction

## 1.1. General system description

This specification defines the design requirements for the analogue optical link to be used in the readout system of the tracker sub-detector of the CMS detector [1.1] at the CERN [1.2] Large Hadron Collider (LHC). The tracker sensing elements are silicon microstrip detectors. The approximate total number of detector channels is 10 millions, to be multiplexed and read-out by approximately 40000 optical links (plus spares). A thorough description of the CMS tracker is found in [1.3].

The CMS tracker optical readout link is embedded into the data acquisition chain shown in Fig. 1.1. It starts at the electro-optic opto- hybrid interface and ends at the opto-electric receiver module interface. Specifications for the Front End Driver board (FED), MUX and APV front-end chips can be found in: [1.4] and [1.5]

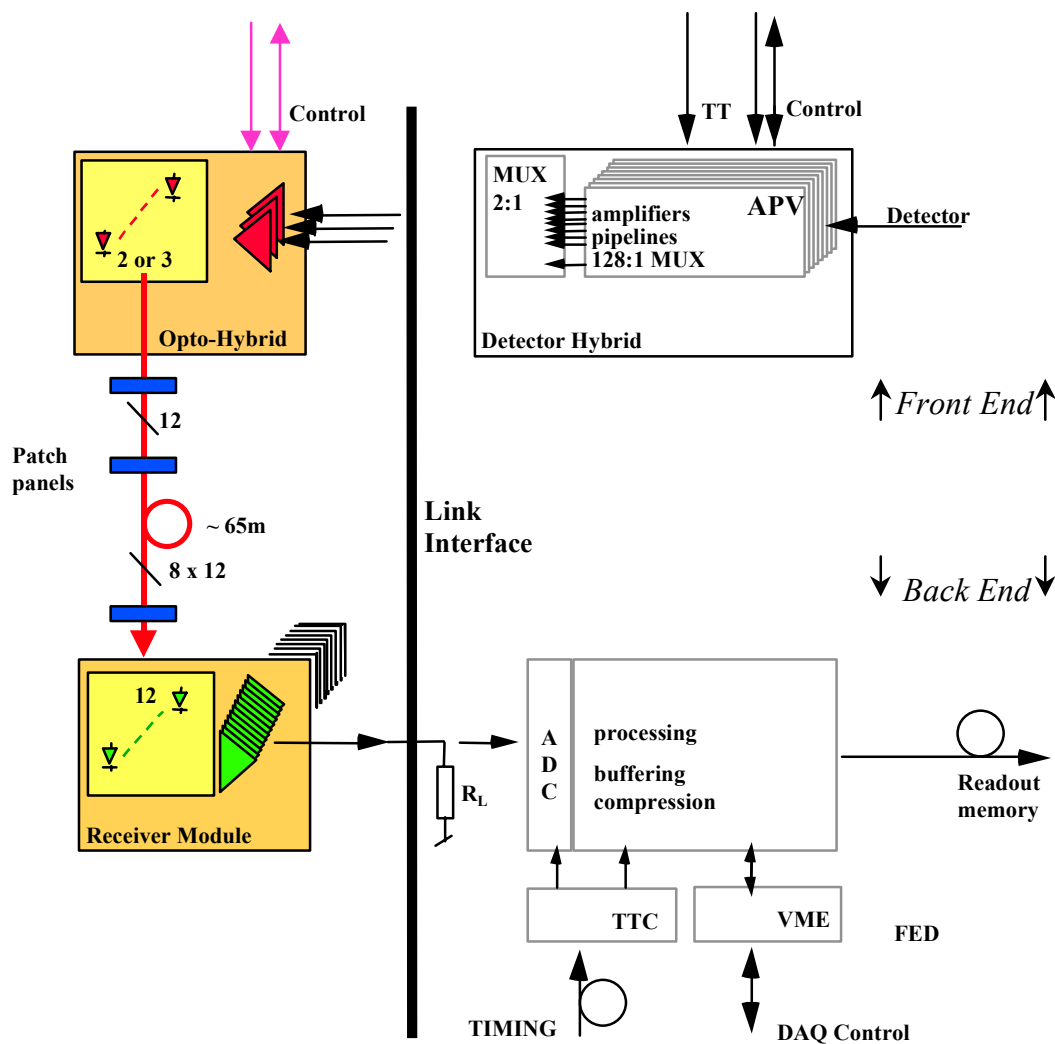


Fig. 1.1. Tracker readout chain with optical link highlighted on the left.

To ease the understanding and use of this document, a brief explanation of the CMS tracker sub-detector data flow is given below. A more detailed description of the CMS tracker readout chain can be found for instance in [1.6]. Signals from all sensor channels are sampled and stored every 25ns in the APV front-end chip analogue memory. In the event of a Level 1 trigger occurrence (TT), the analogue samples corresponding to the time slice of interest in the memory are processed, time multiplexed and transferred in packet form from the detector hybrids to the opto-transmitter hybrids via short lengths of flexible cable tape (0 to 30 cm typ.). They are then sent via optical fibres to the receivers situated at the link back-end, where they are converted back to electrical. A to D conversion, processing and buffering take place on the Front End Driver (FED) boards before the data packets are sent out to the readout memory and computer farms.

## 1.2. Document structure and convention

The optical link specification is broken down into eight independent parts, each describing and specifying a different level or function in the system:

- Part 1. System
- Part 2. Analogue Opto- Hybrid
  - 2.1 Laser Driver
  - 2.2 Laser Transmitter
    - 2.2.1 Terminated Pigtail
      - 2.2.1.1 Buffered Fibre
  - 2.3 Analogue Opto-Hybrid Substrate
- Part 3. Terminated Fibre Ribbon
  - 3.1 Ruggedized Ribbon
- Part 4. Terminated Multi-Ribbon Cable
  - 4.1 Dense Multi-Ribbon Cable
- Part 5. Analogue Opto-Receiver Module
  - 5.1 Analogue Receiving Amplifier
- Part 6. Distributed Patch Panel
  - 6.1 MU-SR Adaptor
- Part 7. In Line Patch Panel
  - 7.1 Connector shell
- Part 8. Backend Patch Panel
  - 8.1 Connector shell

Each part has the following structure:

- |                         |                             |             |               |
|-------------------------|-----------------------------|-------------|---------------|
| 1. Introduction         | 2. Technical requirement    | 3. Glossary | 4. References |
| 1.1. System description | 2.1. description            |             |               |
| 1.2. Document structure | 2.2. block diagram          |             |               |
| 1.3. Related WWW sites  | 2.3. specification          |             |               |
| 1.4. Contact            | 2.4. operating environment  |             |               |
| 1.5. Document history   | 2.5. other characteristics  |             |               |
|                         | 2.6. testing                |             |               |
|                         | 2.7. option (when required) |             |               |

**Due to the preliminary nature of this document, the specification section (section 2.3) of each system part is labelled "target specifications". CERN should be consulted before any hard- or software relying on these characteristics is being designed. Target specifications will eventually evolve into full specifications once the system definition is mature. Still to be determined parameters are labelled TBD.**

### 1.3. Related WWW sites

- CERN laboratory: <http://www.cern.ch/Public/>
- CMS project: <http://cmsinfo.cern.ch/Welcome.html>
- CMS Tracker Technical Design Report: <http://cmsdoc.cern.ch/ftp/TDR/TRACKER/tracker.html>
- CMS Tracker Electronic System: <http://pcvlsi5.cern.ch:80/CMSTControl/>
- CMS Tracker Optical Links: <http://cms-tk-opto.web.cern.ch/>
- FED developments: [http://hepwww.rl.ac.uk/cms\\_fed/](http://hepwww.rl.ac.uk/cms_fed/)
- APV and MUX developments: <http://www.te.rl.ac.uk/med/>

### 1.4. Contact

All questions regarding this document should be addressed to:

F. Vasey  
EP Division  
CERN  
CH-1211 Geneva 23

Fax: +41 22 767 2800  
Phone +41 22 767 3885  
E-mail [francois.vasey@cern.ch](mailto:francois.vasey@cern.ch)

### 1.5. Document history

Rev. 0.4, 02/08/96	Draft
Rev. 1.0, 04/09/97	Major rework, single document covering all system parts
Rev. 2.0, 05/06/98	Rework, document distributed
Rev. 3.0, 21/08/00	Document (Rev2.3) split into independent parts.
Rev. 3.1, 05/09/00	Option for single ribbon and MPO24 added.
Rev. 3.2, 21/09/00	Fibre cladding diameter tolerances decreased.
Rev. 3.3, 27/04/01	Stack option removed.

## 2. Technical requirement, part 3: Terminated Fibre Ribbon Cable

### 2.1. Description

The terminated fibre ribbon cable carries light from the distributed patch-panel (based on single fibre connectors) to the in-line patch-panel (based on multi-fibre connectors). It consists of a 12-way ribbon protected by a sheath of polyethylene and aramide yarn. Several ribbons will be routed together in cable trays over a distance of approximately 5 to 8m. On the distributed patch-panel side, each ribbon cable breaks into single fibres terminated with simplified MU connectors, plugged into 12-way adaptors. On the in-line patch-panel side, each ribbon is terminated with a MT ferrule; the final connector shell is as yet undefined.

The ruggedized ribbon is specified in part 3.1, the distributed patch-panel in part 6, and the in-line patch-panel in part 7 of the optical link technical requirement document.

Altogether, approximately 4000 cables will be required for the CMS tracker detector.

### 2.2. Block diagram

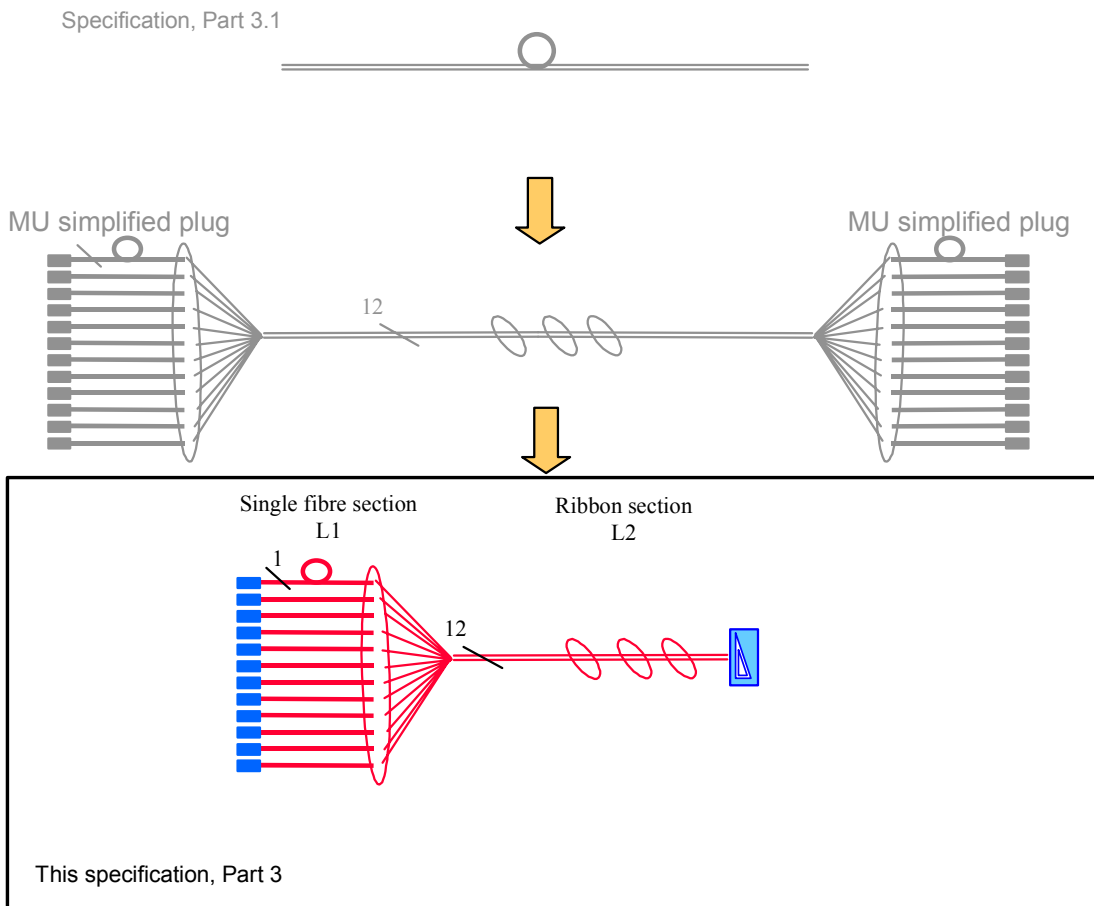


Fig. 2.1. Terminated fibre ribbon cable block diagram

**2.3. Target Specifications (@25°C unless otherwise noted)**

Optical fibre and ruggedized ribbon specifications are to be found in the technical requirement part 3.1.

#	Operational specification	min	typ	max	unit	note
3.1	Number of channels		12			
3.2	Operation Wavelength		1310		nm	
3.3	Connector type on distributed patch panel side	MU Simplified Plug				IEC 61754-6 Insertion orientation shall be marked
3.4	Number of mating cycles	20				Single fibre connector
3.5	Random mate insertion loss			0.6	dB	Single fibre connector
3.6	Random mate return loss	45			dB	Single fibre connector
3.7	Connector type on in-line patch panel side	MT12				IEC 61754-5 Option TBD
		SMC				TIA 604-14 Option TBD
		MFS				EN 186310 Option TBD
		MPO24				Option TBD
3.8	Number of mating cycles	20				Multi fibre connector
3.9	Random mate insertion loss			1.2	dB	Multi fibre connector
3.10	Random mate return loss	50			dB	Multi fibre connector
3.11	Tensile loading on connector			10	N	Operation and installation
3.12	Single fibre section length Lf	0.3	0.5	1	m	Lf to be distributed in 5 to 10 standard lengths with tolerances +20mm, -0mm. Protected by 900µm loose tube
3.13	Ribbon length Lr	3	4	6	m	Lr to be distributed in 5 to 10 standard lengths with tolerances +20mm, -0mm.
	specs 3.14 to 3.60					reserved for future use

## 2.4. Operating environment

#	environmental specifications	min	typ	max	unit	note
3.61	Magnetic field			4	T	parallel to any axis
3.62	Hadronic fluence <sup>1</sup>			3e14	1/cm <sup>2</sup>	Integrated over lifetime <sup>2</sup> 90% charged particles 10% neutrons
3.63	Gamma radiation dose <sup>1</sup>			1.5e5	Gy(Si)	Integrated over lifetime <sup>2</sup>
3.64	Temperature	-20	-10	70	°C	Operation and storage
3.65	Operating humidity			60	%RH	13°C dew point
	specs 3.66 to 3.80					reserved for future use

<sup>1</sup>The component resistance to radiation will be controlled under the sole responsibility of CERN

<sup>2</sup>Foreseen operating lifetime: nominal 10 years.

#	safety specifications		note
3.81	Material composition	Halogen-free, flame retardant material	CERN IS41, see reference [2.2].
	specs 3.82 to 3.99		reserved for future use

## 2.5. Open Characteristics

- single fibre connector plug

fibre strain relief      TBD  
 Plug colour              TBD  
 Plug labelling          TBD  
 Fibre colour code      TBD

- multi-fibre connector plug

fibre strain relief      TBD  
 Plug Colour            TBD  
 Plug labelling        TBD  
 Ribbon labelling      TBD

- Test Documentation and traceability: TBD
- Shipping and storage requirements: TBD
- Installation requirements: TBD



## 2.6. Testing

#	Specification to be tested	Manufacturer		CERN	
		Product Qualification	Lot validation (before delivery)	Pre-production Qualification	Lot Acceptance
3.1	Number of channels	◆	◆	◆	◆
3.2	Operation Wavelength	◆		◆	
3.3	Connector type on distributed patch panel side	◆	◆	◆	◆
3.4	Number of mating cycles	◆		◆	
3.5	Random mate insertion loss	◆	◆	◆	◆
3.6	Random mate return loss	◆	◆	◆	◆
3.7	Connector type on in-line patch panel side	◆	◆	◆	◆
3.8	Number of mating cycles	◆		◆	
3.9	Random mate insertion loss	◆	◆	◆	◆
3.10	Random mate return loss	◆	◆	◆	◆
3.11	Tensile loading on connector	◆		◆	
3.12	Single fibre section length $L_f$	◆	◆	◆	◆
3.13	Ribbon length $L_r$	◆	◆	◆	◆
3.61	Magnetic field	◆	◆	◆	
3.62	Hadronic fluence <sup>1</sup>			◆	
3.63	Gamma radiation dose <sup>1</sup>			◆	
3.64	Temperature	◆			
3.65	Operating humidity	◆			
3.81	Material composition	◆			

## 2.7. Options

- Lengths  $L_f$ ,  $L_r$ ,

### 3. Glossary

This glossary is common to all parts of both the control link and the readout link specification. Some definitions may thus not be relevant to the part under consideration.

#### 3.1. Signal to noise ratio

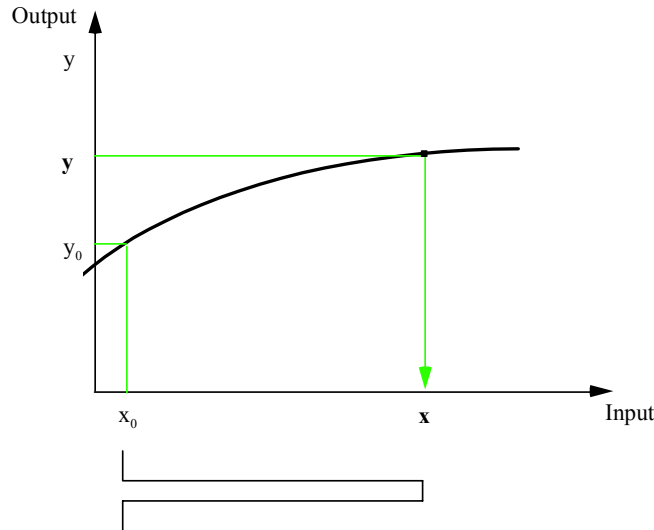


Fig. 3.1. Signal to noise ratio

The signal is defined as  $\Delta y = y - y_0$ , where  $y_0$  is the system quiescent working point.

The rms noise  $y_{rms}$  is defined as the noise spectral density integrated over the full optical link bandwidth.

The signal to noise ratio (SNR) is defined as:

$$SNR = 20\text{Log} \frac{\text{Signal}}{\text{rmsNoise}} = 20\text{Log} \frac{|\Delta y|}{y_{rms}}$$

The peak signal  $\Delta y_{peak}$  is the largest amplitude which can be handled by the optical link in its linear operating range.

The peak signal to noise ratio (PSNR) is defined as:

$$PSNR = 20\text{Log} \frac{|\Delta y_{peak}|}{y_{rms}}$$

#### 3.2. Integral Non-Linearity

The integral non-linearity INL is defined as the full-scale-normalized error one makes when, for a given link output signal  $y$ , the link input signal is assumed to be the linearized value  $x_L$  instead of the real value  $x$ .

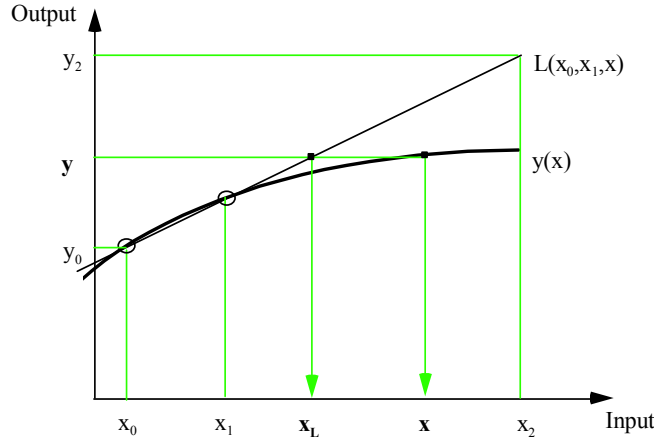


Fig. 3.2. Integral non-linearity

The linear regression is calculated by fitting the transfer characteristic in a linear operation window  $[x_0, x_1]$  (alternatively  $[y_0, y_1]$  in the output range) .

INL is defined as the error one makes when approximating  $x$  by  $x_L$ , normalised by the full-scale signal:

$$INL = \frac{x - x_L}{x_2 - x_0}$$

### 3.3. Settling time

The settling time is defined as the time required for a step response signal to settle to  $\pm 1\%$  of its end value.

### 3.4. Skew

The skew is determined by measuring, for two channels, the average time  $\overline{t_{50}}$  required for a step response signal to reach 50% of its end value. The skew between channels  $i$  and  $j$  is defined as:

$$t_{skew} = \overline{t_{50, j}} - \overline{t_{50, i}}$$

### 3.5. Jitter

The rms jitter is defined as the rms deviation of the time  $t_{50}$  required for a step response signal to reach 50% of its end value:

$$t_{jitter} = \sqrt{\overline{(t_{50} - \overline{t_{50}})^2}}$$

### 3.6. Crosstalk


The crosstalk between two channels  $i$  and  $j$  is defined as the relative feedthrough from channel  $i$  to channel  $j$  at sampling time  $t_s=20\text{ns}$  when an ideal step signal is injected into channel  $i$  at  $t=0\text{s}$ .

$$\text{Crosstalk} = 20 \text{ Log} \left| \frac{\text{Out}_j}{\text{Out}_i} \right|_{t_s=20 \text{ ns}}$$


### 3.7. Insertion loss

The insertion loss (IL) is defined as the Log of the ratio of optical powers measured before (P0) and after (P1) insertion of the device under test (DUT). In case the DUT is a single connector, optical power (P0 and P1) is measured with a large area detector in a receptacle.

a) Launched power measurement (P0)

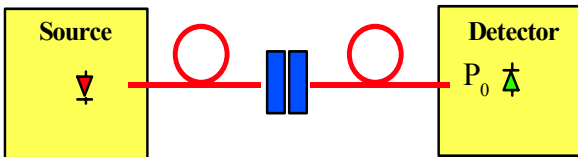

b) Transmitted power measurement (P1)

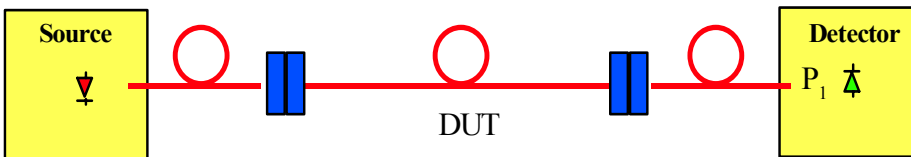

c) Insertion loss:  $IL = 10\text{Log} \frac{P_0}{P_1}$

### 3.8. Power supply rejection ratio

The power supply rejection ratio (PSRR) is defined as the amplitude of a sinusoidal disturbance  $\Delta d$  injected into the power supply rail and causing a ripple  $\Delta y$  on the output of the device under test, divided by the input signal  $\Delta x$  which would cause an identical ripple  $\Delta y$ .

$$PSRR = 20\text{Log} \frac{\Delta d}{\Delta x}$$

## 4. References

- [1.1] <http://cmsinfo.cern.ch/cmsinfo/Welcome.html>
- [1.2] <http://www.cern.ch/>
- [1.3] The tracker project, technical design report, CERN/LHCC 98-6, CMS TDR 5
- [1.4] R. Halsall, "FED specifications", Draft, RAL, [http://hepwww.rl.ac.uk/cms\\_fed/](http://hepwww.rl.ac.uk/cms_fed/)
- [1.5] M. French, "APV specifications", Draft, RAL, <http://www.te.rl.ac.uk/med/>
- [1.6] G. Hall, "Analogue optical data transfer for the CMS tracker", Nuclear Instruments and Methods in Physics Research A, Vol. 386, pp. 138-42, 1997,  
[http://pcvlsi5.cern.ch:80/CMSTControl/documents/Geoff/Readout\\_summary.pdf](http://pcvlsi5.cern.ch:80/CMSTControl/documents/Geoff/Readout_summary.pdf)
- [1.7] A. Marchioro, " Specifications for the Control Electronics of the CMS Inner Tracker", Draft V2, CERN,  
<http://pcvlsi5.cern.ch:80/CMSTControl/manuals.htm>
- [1.8] A. Marchioro, "FEC specification", Draft, CERN
- [1.9] A. Marchioro, "CCU specification", Draft, CERN,  
<http://pcvlsi5.cern.ch:80/CMSTControl/documents/Sandro/Ccu260598.pdf>
- [2.1] M. Huhtinen, "Studies of neutron moderator configurations around the CMS inner tracker and Ecal", CERN CMS TN/96-057, 1996.
- [2.2] [http://www.cern.ch/CERN/Divisions/TIS/safdoc/instr\\_en.html](http://www.cern.ch/CERN/Divisions/TIS/safdoc/instr_en.html)